



BIDS AND AWARDS COMMITTEE
Bid Bulletin No. 1

Proposed PhilSCA Canteen at Villamor Campus
Reference No. PB2019-I-08


This Supplemental Bid Bulletin No. 1 dated December 13, 2019 is being issued to clarify, modify or amend items in the Bidding Documents.

The following items in the Bidding Documents for the **Proposed PhilSCA Canteen at Villamor Campus** as discussed and agreed during the pre-bid conference held last December 10, 2019 are hereby revised/amended:

1. Bid Data Sheet

From ...	To ...
2. The Funding Source is: The Government of the Philippines (GoP) through Corporate Budget for the contract approved by governing Boards; in the amount of One Million Nine Hundred Ninety Seven Thousand Seven Hundred Thirty Four Pesos and Sixty Three Centavos (PhP 1,997,734.63) , inclusive of all government taxes. The name of the Project is Proposed PhilSCA Canteen at Villamor Campus	2. The Funding Source is: The Government of the Philippines (GoP) through Corporate Budget for the contract approved by governing Boards; in the amount of <u>Two Million Pesos (PhP 2,000,000.00)</u> , inclusive of all government taxes. The name of the Project is Proposed PhilSCA Canteen at Villamor Campus
13.2 The ABC is One Million Nine Hundred Ninety Seven Thousand Seven Hundred Thirty Four Pesos and Sixty Three Centavos (PhP 1,997,734.63) ,. Any bid with a financial component exceeding this amount shall not be accepted.	13.2 The ABC is <u>Two Million Pesos (PhP 2,000,000.00)</u> Any bid with a financial component exceeding this amount shall not be accepted.

2. Additional Layout

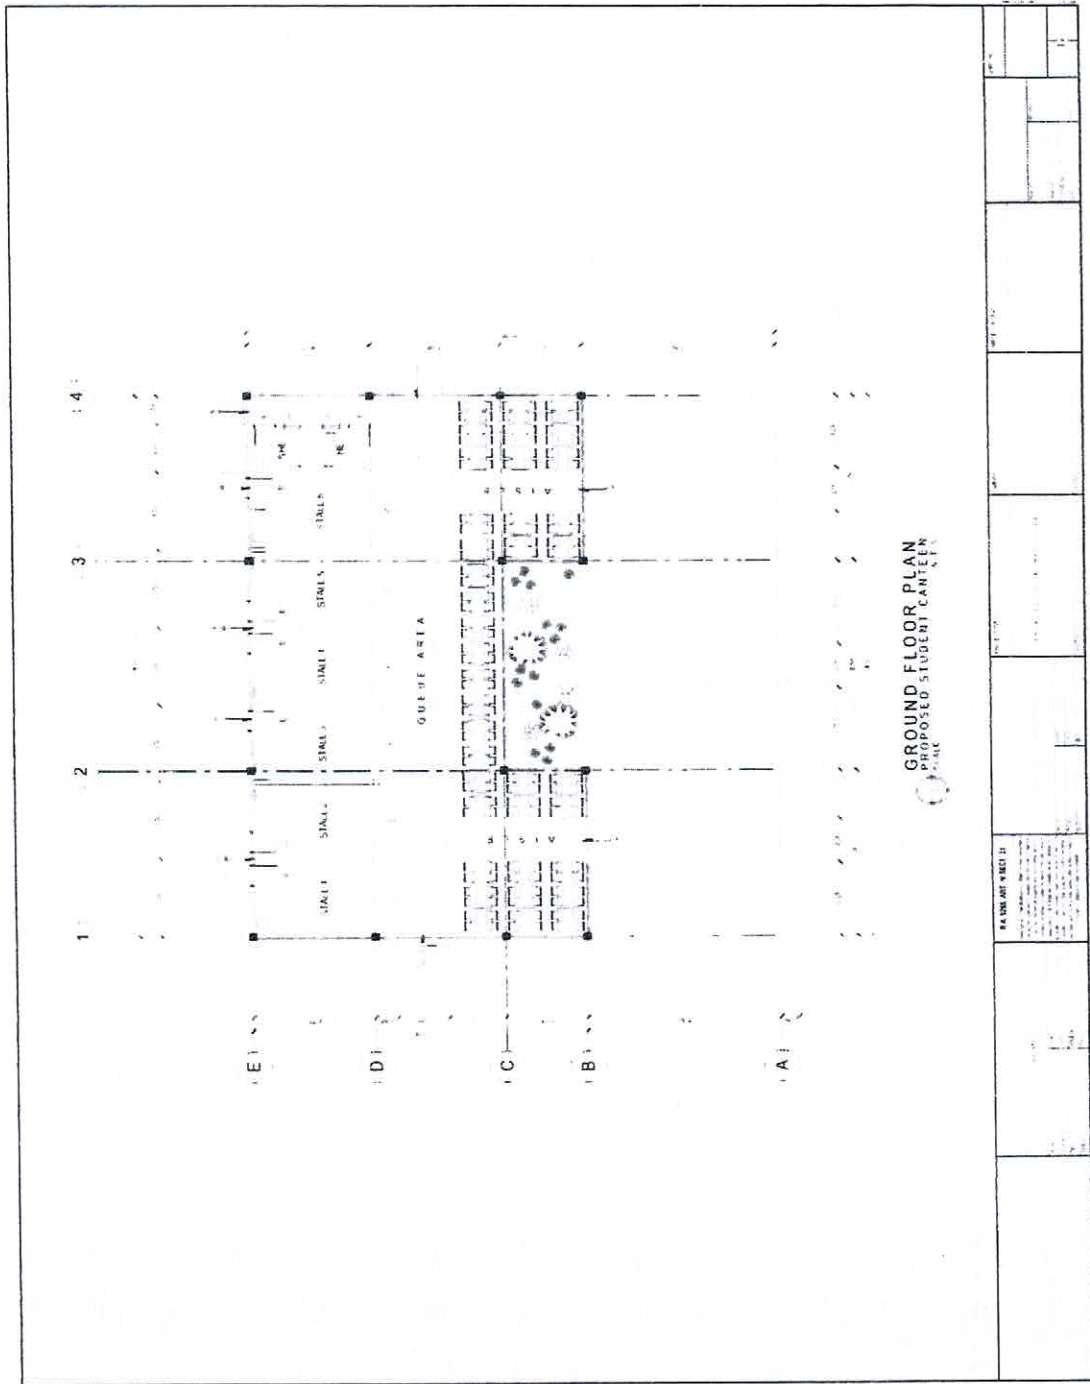

3. New Bill of Quantities and Scope of Work for the Project:



Republic of the Philippines
 Philippine State College of Aeronautics
 Piccio Garden, Villamor, Pasay City

Project Name: Proposed PhilSCA Canteen
 Project Address: Piccio Garden, Villamor, Pasay City

ITEM NO.	SCOPE OF WORKS	QTY	UNIT	U
I	EARTH WORKS:			
	Excavation			
	Column	12 00	cum	
	Wall footing / TB 1	12 00	cum	
	Backfill	140 00	cum	
	SUB-TOTAL			
II	CONCRETE WORKS:			
	Rebars			
	Column Footing (12mm)	60 00	pcs	
	Column (12mm)	52 00	pcs	
	Stir up (10mm)	68 00	pcs	
	Tie wire	10 00	kilo	
	WF			
	DSB 12 mm	56 00	pcs	
	Tie wire	5 00	kilo	
	TB 1			
	DSB 12 mm	45 00	pcs	
	DSM 10mm	150 00	pcs	
	Tie wire	10 00	kilo	
	Vertical bar	52 00	pcs	
	Horizontal bar DSB 10mm	70 00	pcs	
	Tie wire	5 00	kilo	
	CHB # 4	750 00	pcs	
	Cement	290 00	bags	
	Sand	15 00	cum	
	Gravel	6 00	cum	
	(interior & exterior)			
	Plastering	85 00	sqm	
	SUB-TOTAL			
III	FORM WORKS			
	2 X 2 X 8	37 00	pcs	
	2 X 2 X 12	15 00	pcs	
	2 x 3 x 12	10 00	pcs	
	Plywood 6mm	5 00	pcs	
	CWN 5"	10 00	kls	
	CWN 4"	10 00	kls	
	CWN 3"	10 00	kls	
	CWN 2"	5 00	kilo	
	Tie Wire	10 00	kilo	
	SUB-TOTAL			
IV	CONCRETE SLAB			
	DSB 10mm	255 00	sqm	
	Gravel bed 3-4 compacted	6 00	cum	
	Cement	70 00	bags	
	Sand	12 00	cum	
	Gravel	9 00	cum	
	SUB-TOTAL			
V	STRUCTURAL TRUSS			
	G I Pipe 4"	13 00	pcs	
	Turn buckle (16mm)	8 00	pcs	
	Plain round bar (12mm)	25 00	pcs	
	Angle bar 3/16 x 2 x 2 x 20	52 00	pcs	
	Angle bar 3/16 x 1 1/2 x 1 1/2 x 20	34 00	pcs	
	C-Purlins 2 x 6 x 20	110 00	pcs	
	Welding rod	20 00	kilo	
	Red oxide	6 00	gal	
	Cutting disc	5 00	pcs	
	Grinding wheel	10 00	pcs	
	G I Sheet / Long span	630 00	lm	
	Mechanical gutter	32 00	lm	
	End wall	38 00	lm	
	Tekscrew	1,600 00	pcs	
	Accessories	1 00	lot	
	SUB-TOTAL			



Republic of the Philippines
Philippine State College of Aeronautics
Piccio Garden, Villamor, Pasay City


VI	Carpentry Works /Dry walling		
A)	Double walling partition		
	Metal stud 2 x 3	98 00	pcs
	Hardflex	8 00	pcs
	Metal Screw	3 00	box
B)	Ceiling:		
	Metal furring	110 00	pcs
	hardiflex	35 00	sqm
	Sub-total		
C)	TILE WORKS @ Stall:		
	0 60 x0.60	282 00	pcs
	Adhesive	35 00	bags
	Cement	20 00	bags
	Grout	4 00	kilo
	Sand	5 00	cum
	Sub-total		
	Plummming works.		
	Down spout	12 00	lot
	CB	12 00	
	Sewer line	1 00	lot
	Soil pipe	1 00	lot
	lavatory	2 00	set
	Water closet	2 00	set
	S/S Sink with complete accessories	6 00	set
	PVC door	2 00	set
	Sub-total		
	Septic Tank		
	Provision of concrete septic tank	1 00	lot
	ELECTRICAL WORKS		
	Daylight	24 00	set
	Exhaust fan	6 00	set
	C O	30 00	set
	Main panelboard 8 branches	1 00	set
	Panel board 60amps	6 00	set
	Light switches	24 00	set
	Conduit pipes 1/2"	60 00	pcs
	Conduit pipes 3/4	18 00	pcs
	Elbow 1 2	50 00	pcs
	Elbow 3 4	9 00	pcs
	RSC 1 " main entrance	1 00	pcs
	Entrance cap 1"	1 00	pcs
	Utility box	50 00	pcs
	Junction box	45 00	pcs
	THHN 14 Phelps dodge	3 00	box
	THHN 12 phelps dodge	4 00	box
	THHN 10 Phelps dodge	1 00	box
	THHN 6 Phelps dodge	40 00	mitr
	Sub-total		
	Steel works / Railing		
	Tubular 2 x 3x20	50 00	pcs
	Flat bar	105 00	pcs

4. Discussions during the pre-bid conference:
- It was discussed and agreed that the project will use of "Design and Build" scheme. It was agreed that the winning bidder will submit "shop drawing" which will be reviewed and recommended approval by the TWG Committee.
 - The bidder mentioned that the list of layout/drawing has no provision for plumbing requirements and septic tank installation. Even Comfort Room accessories are not reflected in Bill of Quantities.
 - It was also noticed that there is a provision in the layout about the installation of Roll-Up doors for the six stalls but since it was not included in the bill of quantities, the project will exclude the said installation.

This Supplemental Bid Bulletin No. 1 shall form part of the Bid Documents. Any provision in the Bid Documents inconsistent herewith is hereby amended, modified, and superseded accordingly.

For the information and guidance of all concerned.

Issued this 16th day of December, 2019 in the City of Pasay.


(Sgd.)DR. ROWENA S. NAVERA
Chairman, Bids & Awards Committee